

HL-GW64 智能网关主机



HL-GW64

性能特点:

- 标准35mm导轨式安装, 占4个模数位;
- 支持在线更新底层程序;
- 2组HL-Net总线支持64个终端设备;
- 自主研发的HL-Net总线, 可自动识别在线设备, 自动检测设备故障, 为工程安装及以后的检修带来极大方便; 面板与执行的关联采用列表形式, 免去编程的麻烦, 普通电工即可胜任;
- 主机通过网络与IPAD、Andriod触屏组成强大的控制系统;
- 主机数据可导入导出, 避免重复工作;
- 通过网口可本地或远程下载数据;

性能描述:

自主研发的HL-Net总线, 可自动识别在线设备自动检测设备故障, 为工程安装及后的检修带来极大方便; 面板与执行的关联采用列表形式, 免去编程的麻烦, 普通电工即可胜任;

Performance Description

HL-Net Bus ,with independent intellectual property protocol ,can automatically identify online devices and detect device failure, which is convenient for the installation and maintenance of the project .The association between faceplate and execution adopts list form ,which is free from the trouble of programming .General electrician can be competent for engineering configuration.

Performance Characteristics

- Standard 35mm DIN-Rail Installation [Space Occupation:4P(per P:18mm)];
- Online upgrade Bottom program function is available;
- 2 groups of HL-Net bus support 64 ID devices;
- HL-Net Bus ,with independent intellectual property protocol ,can automatically identify online devices and detect device failure ,which is convenient for the installation and maintenance of the project .The association between faceplate and execution adopts list form ,which is free from the trouble of programming .General electrician can be competent for engineering configuration;
- Gateway combined with IPAD , Andriod touch panel through wifi ,can form a powerful control system;
- Gateway's data can be imported and exported to avoid duplication of work;
- Through Ethernet port ,data of local or remote download function is available;

技术参数:


- 供电电源:DC24V 90mA;
- 控制接口:2×HL-Net;
- 网口接口:1×RJ45网口带灯;
- 级联接口:1×RJ45网口带灯;
- 面板接口:1×RJ45网口带灯;
- LED显示:电源×1, 网口×1, 总线状态×1;
- 连接设备:支持64个HL-Net设备;
- 指示灯:1×电源, 1×HL-Net信号指示;
- 外置按键:1×Reset复位键, 1×数据清除键;
- 工程下载:网口下载×1;
- 运行温度/湿度:0℃~45℃/20%~93%RH;
- 储存温度/湿度:-40℃~+55℃/10%~93%RH;
- 外观尺寸:72mm(L)×98mm(W)×68mm(H);
- 重量:190g/pcs;

Technical Parameters

- Power Supply:DC24V 90mA;
- Control Interface:2xHL-Net;
- Ethernet Interface:1xRJ45 with indicator light;
- Cascaded Interface:1xRJ45 with indicator light;
- Faceplate Interface:1xRJ45 with indicator light;
- LED Indication : Power supplyx1, Ethernetx1, Bus Statusx1;
- Number of device connections:Support 64 HL-Net devices;
- Indication Light:1×power Supply, 1×HL-Net Signal Indication I ;
- External Key:1×Reset Key , 1xData clear Key;
- Engineering Download port :RJ45x1;
- Working Temp/Relative Humidity : 0℃~45℃/20%~93%RH;
- Storage Temp/Relative Humidity : -40℃~+55℃/10%~93%RH;
- Dimension : 72mm (L) ×98mm (w) ×68mm (H) ;
- Weight : 190g/PCS;

产品尺寸图 (量度单位:毫米)

Product size (Unit :mm)

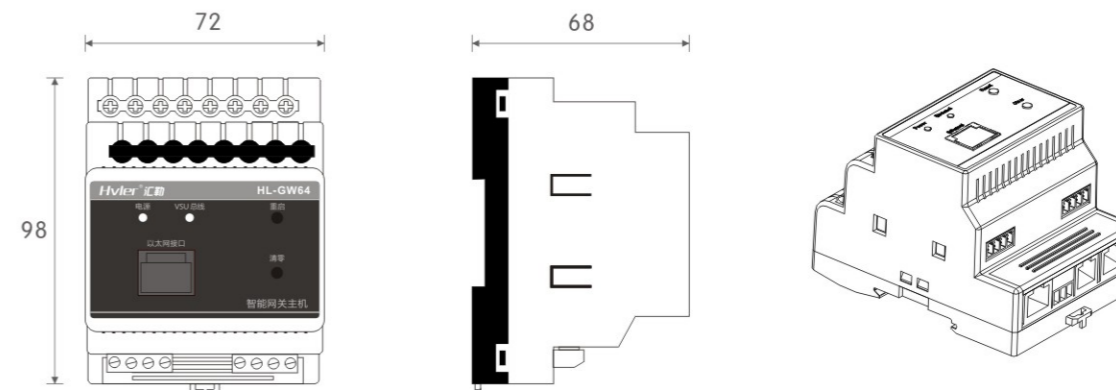

接线原理图 Wiring principle

