

HL-DR0610A

6路10A大功率调光箱



HL-DR0610A

性能特点:

- 挂墙式暗装或明装;
- LED指示灯显示当前回路状态;
- 提供6路外置按键接口;
- 每个回路具有低端限幅、高端限幅、最大限幅以适应不同的负载;
- 每个回路具有独立的标示, 标示名称存储在模块里面;
- 具有过温保护, 短路器保护功能;
- 支持在线刷新程序;
- 采用HL-Net总线通信;

性能描述:

本产品为挂壁式安装, 可控制6路10A(2200W)的射灯筒灯和白炽灯等的电压调光, 输出调光类型为前沿斩波调光; 机箱采用轻巧型设计美观大方,带断路器保护;

Performance Description

The product is installed on the wall. It supplies 6 channel 10A front-edge dimmer. It can achieve the dimming of the voltage of spotlight, down light, filament lamp and so on. The output dimmer type is front-edge dimming. The dimmer box has Light weight design style. It is beautiful and generous. The product has Circuit breaker protection;

Performance Characteristics

- Hanging wall mounted or concealed;
- LED status indicator lamp indicates current channel status;
- Has 6 ways of external button interface ;
- Each channel has low end limitation, high end limitation, maximum limitation to adapt to different types of load ;
- Each channel has low end limitation, high end limitation, maximum limitation to adapt to different types of load ;
- Each channel has its independent label which name is stored in the module;
- Has the function of temperature monitoring, short circuit protection;
- Each channel has its independent label which name is stored in the module;
- Online refreshing program function is available;
- Communicated by HL-Net Bus;

技术参数:


- 供电电源:DC24V 90mA;
- 输入电压: 单相AC220V±10% 或3相AC220V;
- 输出回路: 6路可控硅前沿调光;
- 每回路输出电流: 10A;
- 显示: 6×LED灯, 1×3位数码管;
- 按键: 10×功能键;
- 控制信号: 2×HL-Net总线;
- 保护: 自带过温和断路器保护;
- 运行温度/湿度:0℃~45℃/20%~93%RH;
- 储存温度/湿度:-40℃~+55℃/10%~93%RH;
- 外观尺寸:380mm(L)X400mm(W)X100mm(H);
- 重量:6kg/pcs;

Technical Parameters

- Power Supply : Dc24v 90mA;
- Input voltage: single phase AC220V±10% or 3 phase AC220V ;
- Output channel:6 channel controllable silicon front-edge dimmer;
- Output current of each channel: 10A;
- Display: 6 x LED, 1 x 3 bit digital tube;
- Button: 10xFunction Key
- Control signal:2×HL-Net Bus;
- Protection: With temperature monitoring and connect circuit breaker protection;
- Working Temp/Relative Humidity : 0℃~45℃/ 20%~93%RH;
- Storage Temp/Relative Humidity : -40℃~+55℃/ 10%~93%RH;
- Dimension : 380mm(L)×400mm(W)×100mm(H);
- Weight : 6kg/PCS;

产品尺寸图 (量度单位:毫米)

Product size (Unit :mm)

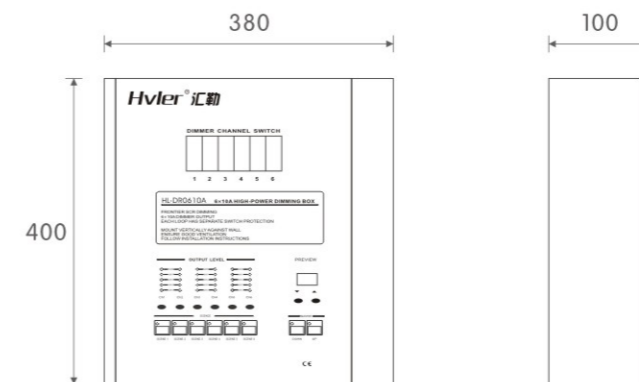

接线原理图

Wiring principle

