

## HL-DR1215A 12路15A大功率调光箱



HL-DR1215A

### 性能特点:

- 挂墙式暗装或明装;
- LED态指示灯显示当前回路状态;
- 提供12路外置按键接口;
- 每个回路具有低端限幅、高端限幅、最大限幅以适应不同的负载;
- 每个回路具有独立的标示, 标示名称存储在模块里面;
- 具有过温保护, 短路器保护功能;
- 支持在线刷新程序;
- 采用HL-Net总线通信;

### 性能描述:

本产品为挂壁式安装, 前沿可控硅调光; 12组调光通道输出, 每通道3300W; 轻巧型设计美观大方。带断路器保护;

### Performance Description

The product is installed on the wall. It supplies 12 channel 15A front-edge dimmer. It can achieve the dimming of the voltage of spotlight, down light, filament lamp and so on. The output dimmer type is front-edge dimming. The dimmer box has Light weight design style. It is beautiful and generous. The product has Circuit breaker protection;

### Performance Characteristics

- Hanging wall mounted or concealed;
- LED status indicator lamp indicates current channel status;
- Has 12 ways of external button interface;
- Each channel has low end limitation, high end limitation, maximum limitation to adapt to different types of load ;
- Each channel has low end limitation, high end limitation, maximum limitation to adapt to different types of load ;
- Each channel has its independent label which name is stored in the module;
- Has the function of temperature monitoring, short circuit protection;
- Each channel has its independent label which name is stored in the module;
- Online refreshing program function is available;
- Communicated by HL-Net Bus;

### 技术参数:


- 供电电源:DC24V 90mA;
- 输入电压: 单相AC220V±10% 或3相AC220V;
- 输出回路: 12路可控硅前沿调光;
- 每回路输出电流: 15A, 12路最大39600W;
- 显示: 3×LED灯, 1×LED显示屏;
- 按键: 6×功能键;
- 控制信号: 2×HL-Net总线;
- 保护: 自带过温和断路器保护;
- 运行温度/湿度:0℃~45℃/20%~93%RH;
- 储存温度/湿度:-40℃~+55℃/10%~93%RH;
- 外观尺寸:400mm(L)X870mm(W)X150mm(H);
- 重量:14kg/pcs;

### Technical Parameters

- Power Supply : Dc24v 90mA;
- Input voltage: single phase AC220V±10% or 3 phase AC220V ;
- Output channel:12 channel controllable silicon front-edge dimmer;
- Output current of each channel: 15A;
- Display: 3 x LED, 1 x 3 bit digital tube;
- Button:6xFunction Key
- Control signal:2×HL-Net Bus;
- Protection: With temperature monitoring and connect circuit breaker protection;
- Working Temp/Relative Humidity : 0℃~45℃/ 20%~93%RH;
- Storage Temp/Relative Humidity : -40℃~+55℃/ 10%~93%RH;
- Dimension : 400mm(L)×870mm(W)×150mm(H);
- Weight : 14kg/PCS;

### 产品尺寸图 (量度单位:毫米)

### Product size (Unit :mm)

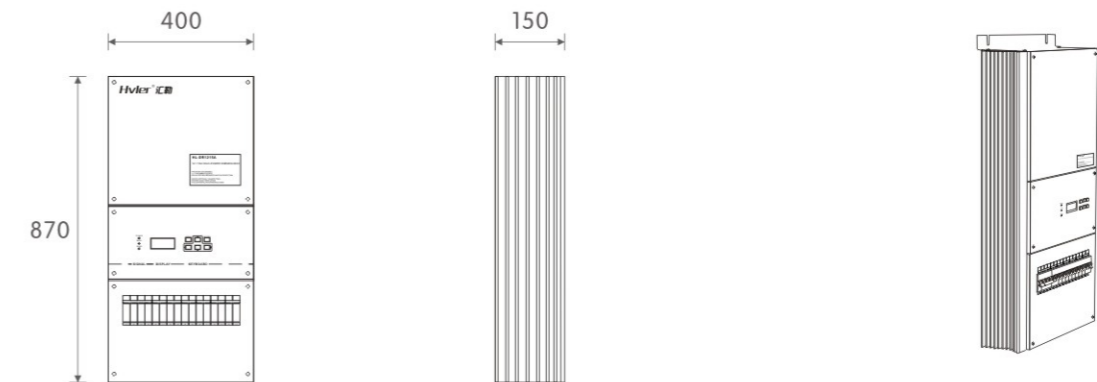

### 接线原理图 Wiring principle

